
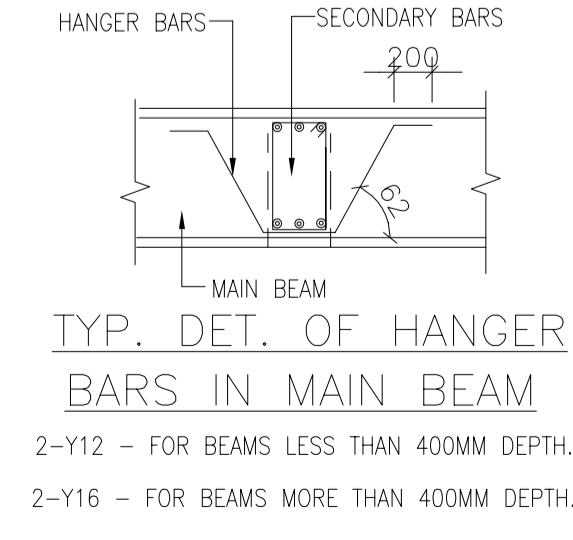


- NOTES:
1. ALL DIMENSIONS ARE IN MM AND LEVELS ARE IN METRES.
  2. GRADE OF CONCRETE SHALL BE M30.
  3. CLEAR COVER FOR MAIN REINFORCEMENTS SHALL BE AS FOLLOWS :  
 a) FOR BEAMS - 30mm
  4. Y - DENOTES HIGH YIELD STRENGTH DEFORMED BARS HAVING YIELD STRENGTH NOT LESS THAN 415 N/mm<sup>2</sup> CONFORMING TO IS: 1786-1985.
  5. LAP LENGTH SHALL BE 40 TIMES DIA OF BAR AND SHALL BE KEPT STAGGERED.
  6. THIS DRG. SHALL BE READ IN CONJUNCTION WITH THE FOLLOWING  
 DRG. NO 03368-C-RB-05-NU-014  
 DRG. NO 03368-C-RB-05-RC-015

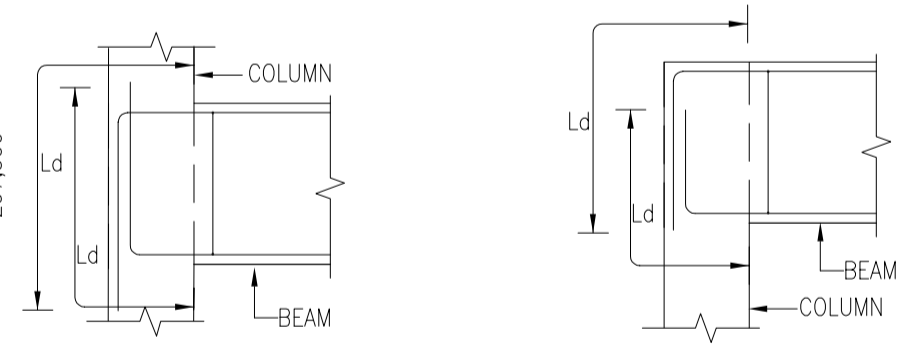

THE FOLLOWING BAR NOS. NOT USED  
 294,306,307

0	ISSUED FOR CONSTRUCTION	AS	28.10.05	VDR	28.10.05	KMD	28.10.05	KMD	28.10.05
REV.NO.	DESCRIPTION	DESIGNED	DRAWN	CHECKED	APPROVED				
REVISIONS									
		<b>LARSEN &amp; TOUBRO LIMITED</b> ECC Division - EDRC							
CLIENT: L & T INFOCITY LIMITED					CONSULTANT:				
PROJECT: SERENE COUNTY AT HYDERABAD									
SUPPLIER / CONTRACTOR:									
JOB No.:		NAME		SIGN		DATE		TITLE:	
DSGN		AS				28.10.05		TOWER C1	
DRWN		VDR				28.10.05		RC. DET. OF BEAMS AT +2.95M LVL.	
CHKD		KMD				28.10.05		(LEVEL L2)	
APPD		KMD				28.10.05			
SCALE		1:40							
PROJECTION									
SIZE		A1							
REV		0							
DRG. No. <b>0 3 3 6 8 - C - R B - 0 5 - R C - 0 0 1 6</b>									
SHEET 2 OF 2									
RELEASED FOR <input type="checkbox"/> PRELIMINARY <input type="checkbox"/> TENDER <input type="checkbox"/> INFORMATION <input type="checkbox"/> APPROVAL <input checked="" type="checkbox"/> CONSTRUCTION									